

Datasheet

A400 Pump with driver



Product description



The innovative Abyzz A400 pump with its titanium impeller consists of powerful and programmable menu-controlled electronics (driver) and a sinusoidal, three-phase synchronous motor (pump). The efficiency factor of the motor is more than 90%, which, along with the fact that you can adjust the speed to meet your performance requirements, makes it an energy-saving solution.

The integrated bearing flushing provides optimum protection against calcination and, in conjunction with the silicon carbide bearings and special hard metal shaft, ensures low-maintenance operations.

The materials used are designed to have a long lifetime and meet the highest requirements and quality standards. This product was developed and manufactured in Germany by venotec.

„Made in Germany“

Special features

- Variable speed range (0 - 100%)
- Programmable control system (e.g. wave and random modes)
- Comprehensive safety functions (e.g. dry run, temperature, and overcurrent protection)
- Soft startup
- Bus-enabled interface for peripheral devices
- Lockable plug contacts
- Low-noise operation
- Choice of 3m or 10m cable length

Applications



- Freshwater and seawater aquaristics
- Pond filter systems
- Creeks

Technical data

The pump pipes can be immersed or in a dry position. Please note that this pump is not self-priming.

Maximum flow rate	: 23.500 l/h
Rated flow rate	: 18.600 l/h
Discharge flow speed	: max. 7,5m/s : nom. 6,4m/s
Delivery height	: max. 9,4m
Rated input	: 4...400W
Operating voltage	: 230V~, 50...60Hz
Ambient temperature	: +2°C...+40°C
Maximum operating pressure	: 1,2 bar
Maximum immersion depth	: 2 Meter
Pump cable length	: 3m oder 10m
Inlet/outlet connections	: 50mm/40mm (suitable for PVC/AVB adhesive fittings)

Characteristics

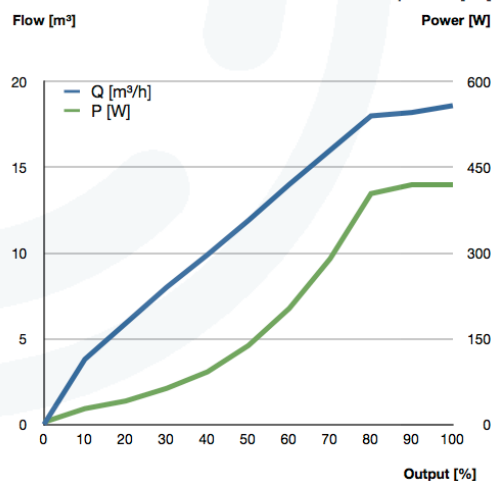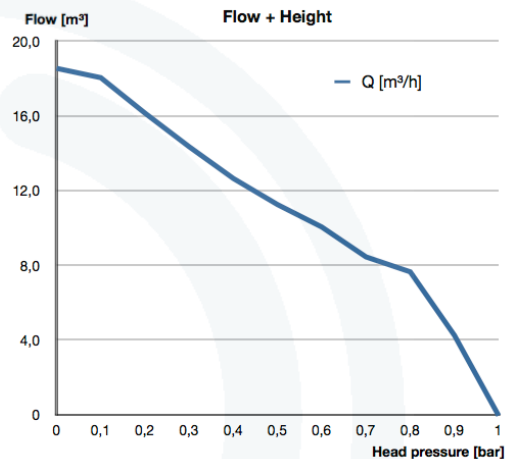

Scope of delivery

- Abyzz A400 pump and driver
- Mains cable (1.5m) and connecting cable
- Operating manual

We reserve the right to make technical changes.

Datasheet

A400 Pump with driver



Dimensions

