

## Lamp Installation MOONLIGHT series


additional installation guide for the MH bulbs

**If you are in any doubt about the installation or operation of this product, please consult a qualified and experienced electrician.**


Normally, after factory testing, your pendant lamp(s) and the metal halide bulbs are removed and packed separately inside the box to avoid transit damage. Although normal maintenance will later be carried out with the pendant hanging, it is easier at this stage to re-install the lamp(s) and protective shield(s) before fixing the pendant.

**Caution! Disconnect the pendant from the mains supply before starting with the below procedure!!!!**

**Step1 : remove the moonlight reflector**

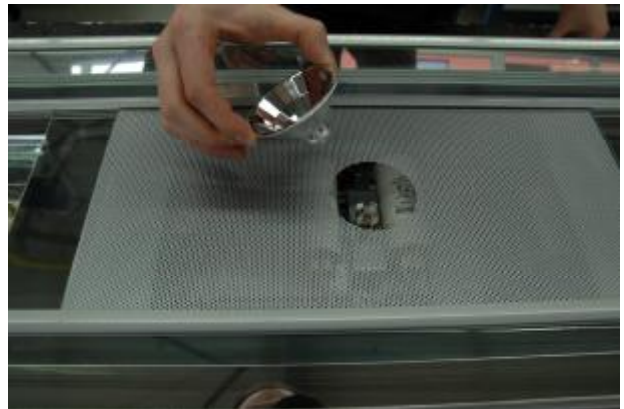

**Step 2: remove the endplate of the pendant on the opposite side of the display by untighten the screws with the allen key. NEVER OPEN THE ENDPLATE WITH THE COMPUTER DISPLAY**

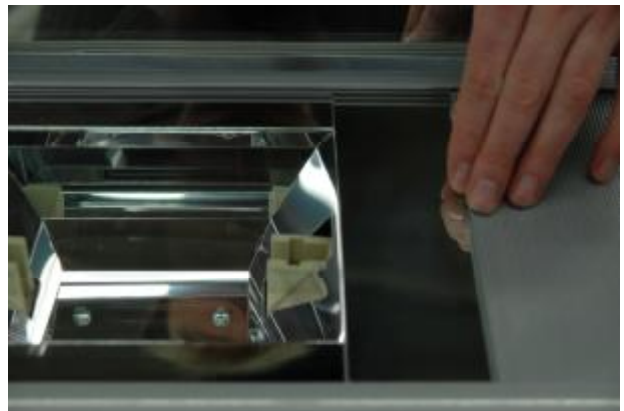

**Step 3: slide the mesh and the protective shields to get access to the MH bulb reflectors**



**Step 4: install the metal halide bulbs**

Try to keep your fingers off the lamps and remove any marks or fingerprints with alcohol or methylated spirit and a clean rag. It may be easier to hold the lamp in clean rag or tissue while installing it. Install all metal halide lamps firmly, but without undue force.

For installing the following lamp types:


**Metal halide with Rx7s lampholders (150W)**

Locate one end of the lamp onto one of the sprung lampholder contacts, then push the lamp against the lampholder contact until sufficient space is available to locate the other end of the lamp onto the other lampholder.

**Metal halide with Fc2 lampholders (250W)**

Hold the lamp at each end, place the narrower edges of the two lamp contacts into the recesses in the lampholder, then firmly push the lamp into place trying to locate both ends simultaneously. Make sure that both ends are correctly located.

**Step 5: assemble the pendant vice versa**

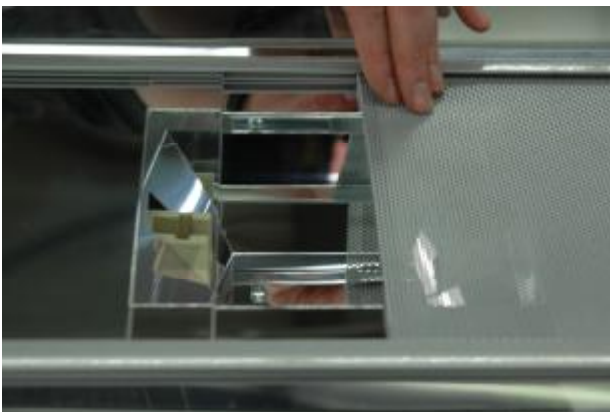

Put the little moonlight reflector back in place by pushing firmly, but without undue force, into the springs. Locate the endplate using the screws provided

## **IMPORTANT**

**Protective shields:** To protect against water splash, lamp explosion and harmful UV output: Never operate the pendant without the protective shield and always replace any cracked protective shield.